



# GREENDEC® Sanitized® Type Connectdec

ACOUSTICALLY AND THERMAL INSULATED DUCTING

## Features Inner duct:

This high Tech-inner core material is protected with the antimicrobial **Sanitized®** hygiene function to reduce microbial growth and unpleasant odors on the surface.

## ANTI-MICROBE PROTECTION

Image Non-Sanitized® cloth:


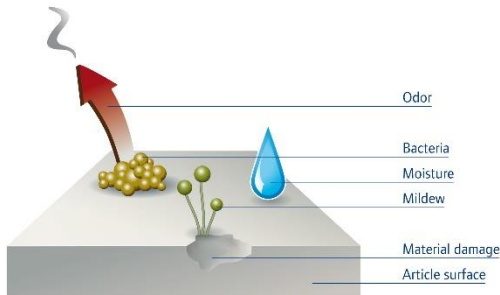


Image Sanitized® protection of Innerduct of Polypropylene cloth:

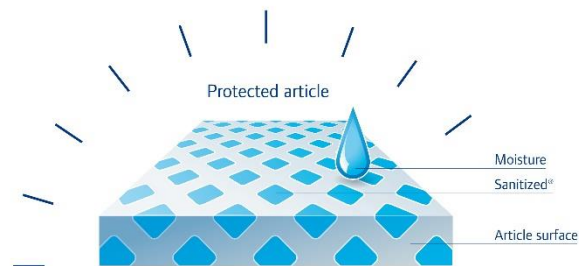

**GREENDEC® Sanitized®** consists of a **Polypropylene fabric cloth inner duct**, protected with the antimicrobial Sanitized® hygienic function to reduce bacteria growth, it reduces odor-causing bacteria, protecting the material permanently for peace of mind and more freshness.

## Properties GREENDEC® self-stretching Inner duct:

- Sanitized® Polypropylene fabric cloth inner duct code: ZNW 70 FRABG-01
- The integrated antimicrobial Sanitized® hygiene function helps to keep everyday items, surfaces, and appliances clean and offers 24/7 protection against bacteria and odors. BPR PT9 compliant for more information see: [www.sanitized.com](http://www.sanitized.com)
- Properties are not subject to aging and or temperature influences
- Vapor pressure Hydrophobic
- Odorless
- Tested and approved according to ISO 184 table 2 in method A of growth intensity 0 and in method C of growth intensity 0. (Test certificates: W-354476e-22-Ho und W-354477e-22-Ho dated 06.01.22)

This means that the inner material with code ZNW 70 FRABG-01: forms no nutrient basis for the development of microorganisms. **The tested material therefore meets the requirements with respect to microbial metabolism based on VDI 6022, sheet 1 (01/2018) "Hygiene requirements and room technology systems and devices"**. Further material requirements according to VDI 6022, Sheet 1 must be checked separately.

## Optional DEC®TECH-Barrier:

- Acoustical performances with DEC®TECH-Barrier
- M0 classified
- Avoid leakage
- Avoid pressure drop
- Avoid cold bridge
- Avoid odor
- Avoid emission of insulation particles into the airstream

## APPLICATION

- Cleanrooms
- Hospitals
- Heat recovery units
- Air-conditioning systems
- Air supply systems
- Preventing condensation in air ventilation systems
- ALL HVAC systems

## LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in detail at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

## PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

## TRADEMARKS:

The DEC logo and DEC International are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

## RESTRICTIONS:

The SONODEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the ducts suitable for transporting air with a high concentration of acid and base.





# GREENDEC® Sanitized® Type Connectdec

ACOUSTICALLY AND THERMAL INSULATED DUCTING


## SPECIFICATIONS

Article code:	<b>CO(1,2,3)SBIGAB{Ø}/L</b>
Temperature range:	
Inside:	-30 °C to 90 °C
Outside:	-30 °C to 140 °C
Operating pressure:	up to +2000 Pa
Operating air velocity:	max. 30 m/s
Min. bending radius:	0.54 x Ø + 25mm
Diameter range:	80 - 315 mm
Standard length:	1 and 3 meters
Appearance:	Aluminum


## CONSTRUCTION

Inner duct	High-Tech non-woven polypropylene fabric cloth with <b>Sanitized®</b> treatment
Glass wool blanket:	25mm, 16kg/m <sup>3</sup>
R-value glass wool:	0.65m <sup>2</sup> K/W (ASTM C177-76)
Outer jacket:	Aluminum/polyester outerjacket
Classification:	According
ISO 184 Method A:	0
ISO 184 Method C:	0
EU (EN 13501-1):	B-s1d0

## PRESSURE LOSS (STRAIGHT DUCT)

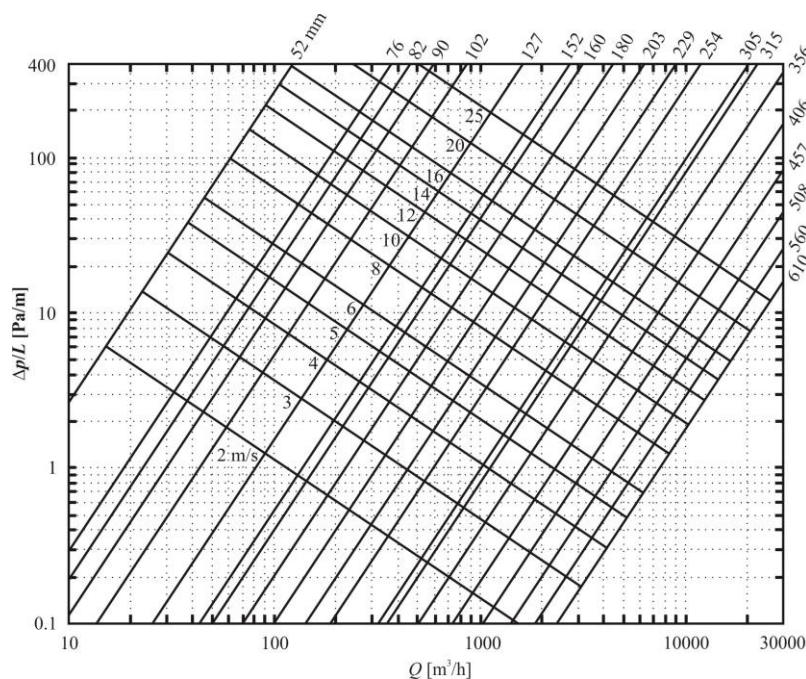

**Regulation or protocol**  
French VOC Regulation



**Version of regulation or protocol**  
Regulation of March and May 2011  
(DEVL1101903D and DEVL1104875A)

### A Sanitized sound attenuator with thermally and acoustically properties.

Optional: the insulation wool and the inner core to be separated by a DEC®TECH-Barrier surrounding the inner core. The DEC®TECH-Barrier has inorganic aluminum layers at both sides to prevent grow of microbes as well to prevent that the airstream can affect the Thermal conductivity of the insulation wool.

Note: The DEC®TECH-Barrier gives different acoustical properties:



The **Greendec®- type Connectdec®** fulfills all the requirements and are classified as specified within EN 13180: *Ventilation for buildings – Ductwork - Dimensions and mechanical requirements for flexible ducts.*

#### LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in detail at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

#### PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

#### TRADEMARKS:

The DEC logo and DEC International are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

#### RESTRICTIONS:

The SONODEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the ducts suitable for transporting air with a high concentration of acid and base.





# GREENDEC® Sanitized® Type Connectdec

ACOUSTICALLY AND THERMAL INSULATED DUCTING

Acoustical performances without DEC®TECH-Barrier and with standard aluminum outer jacket:

**SOUND**

**ATTENUATION**

According to **ISO 7235**  
± 2 dB

<b>CO(1,2,3)SBGAB{Ø}/1.0</b> Insulation glass wool 25mm (Test report nr. A1672-1 Peutz bv - The Netherlands)										
<b>D<sub>n</sub></b> <b>(mm)</b>	<b>L</b> <b>(m)</b>	<b>Attenuation, dB - Mid-frequency, Hz</b>								<b>D<sub>i</sub></b> <b>(dB)</b>
		<b>63</b>	<b>125</b>	<b>250</b>	<b>500</b>	<b>1000</b>	<b>2000</b>	<b>4000</b>	<b>8000</b>	
080	<b>1.0</b>	13.6	22.4	40.2	38.7	36.5	41.3	51.6	45.8	39
100	<b>1.0</b>	15.9	22.9	31.1	38.6	36.4	40.6	50.1	35.9	39
125	<b>1.0</b>	11.7	18.9	32.4	29.9	28.8	34.5	40.9	24.5	32
150	<b>1.0</b>	12.2	10.9	29.7	30.1	29.0	38.3	34.6	20.4	32
160	<b>1.0</b>	19.3	25.4	30.5	27.1	23.8	32.2	27.8	17.3	28
200	<b>1.0</b>	10.7	12.1	28.7	22.8	22.8	30.6	19.4	11.9	26
250	<b>1.0</b>	12.9	18.7	24.3	19.5	19.9	27.7	12.9	10.2	22
315	<b>1.0</b>	16.6	23.2	18	15.2	16.5	19.6	10.1	8.5	17
<b>CO(1,2,3)5SBGAB{Ø}/1.0</b> Insulation glass wool 50mm										
100	<b>1.0</b>	4.3	8.5	15.5	28.2	50.8	51	57.8	38.5	30
125	<b>1.0</b>	17.7	26.3	35.4	29.2	33.3	45.4	40.5	26.5	35
160	<b>1.0</b>	16.5	24.1	30.6	27.5	29.6	41.7	28.7	18.1	32
180	<b>1.0</b>	17.3	28.5	28.9	25.1	30.7	38.3	22.7	18.3	-
200	<b>1.0</b>	6.5	6.3	21.1	27.1	30.5	35.8	19.4	12.3	29
250	<b>1.0</b>	9.0	10.0	22.0	24.0	28.0	28.0	13.0	9.0	-
315	<b>1.0</b>	12.4	14.0	23.7	21.5	25.7	16.0	6.9	5.9	-
<b>CO(1,2,3)SBGAB{Ø}/3.0</b> Insulation glass wool 25mm										
200	<b>3.0</b>	17.3	30.7	36.8	32.7	34.5	40.3	40.8	22.8	37
250	<b>3.0</b>	22.4	30.7	33.5	31.0	32.0	38.9	26	16.2	35
315	<b>3.0</b>	31.7	32.5	29.1	25.2	28.2	37.3	16.6	14.6	30
<b>D<sub>i</sub> = Average attenuation</b>										

**Properties insulation**



**Reach/RoHs Compliant**

**LIABILITY:**  
The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in detail at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

**PLEASE NOTICE:**  
The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

**TRADEMARKS:**  
The DEC logo and DEC International are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

**RESTRICTIONS:**  
The SONODEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the ducts suitable for transporting air with a high concentration of acid and base.





# GREENDEC® Sanitized® Type Connectdec

ACOUSTICALLY AND THERMAL INSULATED DUCTING

Acoustical performances without DEC®TECH-Barrier and with standard aluminum outer jacket:

**WALL  
REDUCTION**  
According: **ISO 7235**  
± 2 dB

<b>CO(1,2,3)SBGAB{Ø}/1.0</b> Insulation glass wool 25mm (Test report nr. A1672-1 Peutz bv - The Netherlands)										
D <sub>n</sub> (mm)	L (m)	Wall reduction, dB - Mid-frequency, Hz								D <sub>i</sub> (dB)
		63	125	250	500	1000	2000	4000	8000	
080	1.0	29.7	24.6	20.4	14.1	12.1	14.7	16.8	21.6	14
100	1.0	28.9	24.0	19.4	14.8	13.7	15.2	18.6	22.9	15
125	1.0	24.6	21.2	16.4	12	11.9	13.6	15.9	20.1	13
150	1.0	25.4	21.6	17.1	13.3	11.3	13.2	15.0	17.3	13
160	1.0	23.5	19.0	13.8	10.2	9.5	10.4	13.1	16.2	28
200	1.0	22.4	19.1	14.0	9.8	9.0	9.1	11.8	15.1	26
250	1.0	22.6	16.2	11.5	10.1	9.1	9.9	12.4	15.7	22
315	1.0	19.6	13.4	9.3	8.1	7.8	8.7	11.6	14.7	17
<b>CO(1,2,3)5SBGAB{Ø}/1.0</b> Insulation glass wool 50mm										
100	1.0	34.1	34.0	28.4	21.1	19.1	19.9	23.4	26.7	20
125	1.0	25.3	21.8	17.9	15.0	15.7	19.1	21.3	24.7	17
160	1.0	24.7	19.6	14.2	11.1	13.0	15.4	19.3	20.9	14
200	1.0	26.1	21.5	15.2	11.7	11.8	13.5	17.5	19.8	13
<b>CO(1,2,3)SBGAB{Ø}/3.0</b> Insulation glass wool 25mm										
200	3.0	21.4	18.7	13.6	10.4	9.7	9.7	12.1	15.0	37
250	3.0	21.7	16.1	11.3	10.6	10.1	10.2	13.2	16.3	35
315	3.0	19.3	12.4	9.4	8.3	8.6	9.6	12.1	14.6	30
<b>Di = Average attenuation</b>										

**Properties insulation**



**Reach/RoHs Compliant**

**LIABILITY:**  
The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in detail at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

**PLEASE NOTICE:**  
The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

**TRADEMARKS:**  
The DEC logo and DEC International are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

**RESTRICTIONS:**  
The SONODEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the ducts suitable for transporting air with a high concentration of acid and base.

