DEC INTERNATIONAL TECHNICAL SPECIFICATIONS



DCD-SA **SQUARE DIFFUSERS**



PRODUCT PROPERTIES

Square air diffuser CD-SA-145

Application

- The square ceiling diffuser is ideal for flush mounting in ceilings.
- Suitable for use in rooms with heights up to 4m.
- Ceiling diffusers can be used for both supply and exhaust air applications.
- The diffuser core is available in 1, 2, 3 and 4 way discharge pattern.
- The inner core is removable (Safety wire is available)
- Can match with plenum box.




Material

The diffuser face is made of extruded aluminium sections with powder coated white RAL9016.

Size: 150x150 mm, 225x225 mm, 300x300mm, 375x375 mm, 450x450mm

Туре	N mm
DCD-SA-145-300	150
DCD-SA-145-375	225
DCD-SA-145-450	300
DCD-SA-145-520	375
DCD-SA-145-600	450

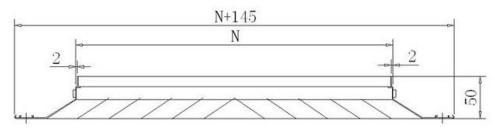

Also available with Damper. Operation of the slats via a lever.

Type
DCD-SA-145-300VCD
DCD-SA-145-375VCD
DCD-SA-145-450VCD
DCD-SA-145-520VCD
DCD-SA-145-600VCD









LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

PLEASE NOTICE:

PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

TRADEMARKS:

DEC International and the DEC logo are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.