



SONODEC 50 TRD NON-WOVEN

FLEXIBLE SOUND ATTENUATORS

The **SONODEC 50 TRD NON-WOVEN** consist of a Polypropylene fabric cloth inner duct, thermal insulated with a glass wool layer and provided with an aluminium laminated outer jacket. The inner duct is hydrophobic. Both ends are taped to make ready-made connections.

APPLICATION

- Air supply systems
- Air conditioning systems
- Insertion loss damper
- Sound attenuator
- Decreasing sound of machines

SPECIFICATIONS


Article code: SBIT50{Ø}/L
 Temperature range: -30 °C to 140 °C
 Operating pressure: up to +2500 Pa
 Operating air velocity: max. 25 m/s
 Min. bending radius: 0.54 x Ø + 50mm
 Standard diameter range: 82 – 315 mm
 Standard length: 0,5+1+1,5+2 mtr

CONSTRUCTION


Inner duct: Non-woven Polypropylene fabric cloth
 Glass wool blanket: 50mm, 16kg/m³
 Outer jacket: alu/poly laminate
 R-value glass wool: 1.3 m² K/W (ASTM C177-76)
 Appearance: aluminium



PRESSURE LOSS (STRAIGHT DUCT)

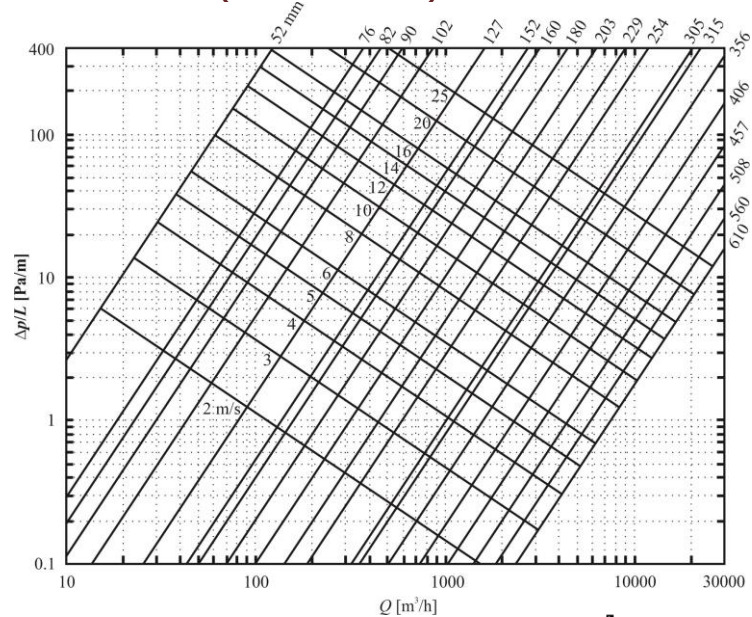

- A. inner duct
- B. barrier
- C. glass wool
- D. outer jacket
- E. gasket

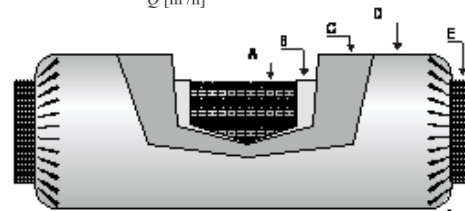

Regulation or protocol
French VOC Regulation

Conclusion



Version of regulation or protocol
Regulation of March and May 2011 (DEVL1101903D and DEVL1104875A)

The **SONODEC 50 TRD NON-WOVEN** fulfills all the requirements and are classified as specified within EN 13180: *Ventilation for buildings – Ductwork - Dimensions and mechanical requirements for flexible ducts.*

Reach/RoHs Compliant

Directive 2011/65/EU RoHS
 Phthalates according to 1907/2006/EC REACH
 Test result: Pass - The test items meets the requirements of the test specification



LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

TRADEMARKS:

SONODEC, the DEC logo and DEC International are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

RESTRICTIONS:

The SONODEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the SONODEC ducts suitable for transporting air with a high concentration of acid and base.





SONODEC 50 TRD NON-WOVEN

FLEXIBLE SOUND ATTENUATORS

SOUND ATTENUATION
According to: **ISO 7235**

Non-woven ins. 50mm (Test report nr. A1672-1/A3198-1 Peutz bv - The Netherlands)										
100	1.0	4.3	8.5	15.5	28.2	50.8	51	57.8	38.5	30
125	1.0	17.7	26.3	35.4	29.2	33.3	45.4	40.5	26.5	35
160	1.0	16.5	24.1	30.6	27.5	29.6	41.7	28.7	18.1	32
180	1.0	17.3	28.5	28.9	25.1	30.7	38.3	22.7	18.3	-
200	1.0	6.5	6.3	21.1	27.1	30.5	35.8	19.4	12.3	29
250	1.0	9.0	10.0	22.0	24.0	28.0	28.0	13.0	9.0	-
315	1.0	12.4	14.0	23.7	21.5	25.7	16.0	6.9	5.9	-

D_i = Average attenuation

LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

TRADEMARKS:

SONODEC, the DEC logo and DEC International are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

RESTRICTIONS:

The SONODEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the SONODEC ducts suitable for transporting air with a high concentration of acid and base.

