

QUADRODEC ®

Quadrodec® Wall plate connector Ø160mm



Description

Wall plate round connector Ø160mm with EPDM on both sides. Can be used universally for all round female connections with the same nominal diameter of the Quadrodec system.

Connection:

Male/Male

Material:

DX53D, Zinc plated 275g/m²
EN ISO 9227:2006

DEC®Safe-connection:

EPDM, fixed connection
IEC 60695-2-11:2014 (TÜV)
REACH, ROHs (TÜV)

Classification

EN 13501-1:2018:

Class A1


EN 12237:

Leakage Class D/(ATC2)

Ansi Ashrae 120-2017:



Pressure loss

Leakage

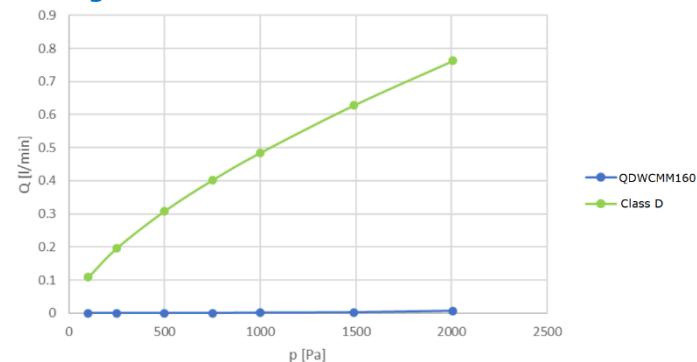


Also available in size Ø125mm.

Order code: QDWCM160

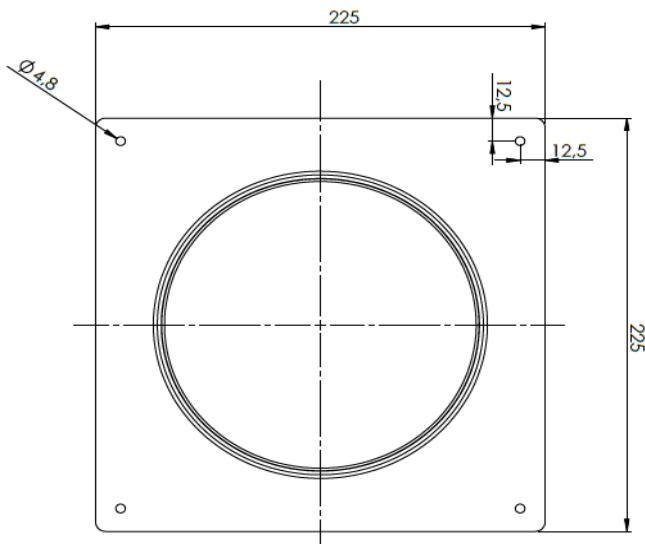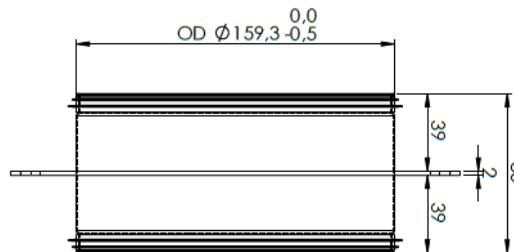

Pressure loss

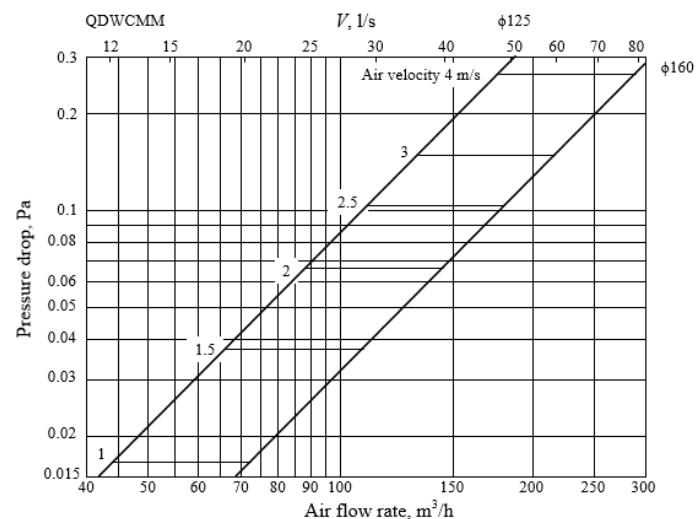

LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

TRADEMARKS:

QUADRODEC, the DEC logo and DEC International are trademarks or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

RESTRICTIONS:

The QUADRODEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the ducts suitable for transporting air with a high concentration of acid and base.

