



# SEMIDEC GALVANIZED 160

SEMI-FLEXIBLE CORRUGATED DUCTING

**SEMIDEC GALVANIZED 160** is a superb semi-flexible duct constructed of two layers of corrugated galvanized steel of 80 Microns. 100% recyclable.

## APPLICATION

- ! Suitable for mechanical air supply systems and air conditioning systems
- ! Systems, where vapors should be exhausted
- ! Suitable to be used in concrete up to Ø 140MM, always check the corroding activity of the concrete slam before using the galvanized duct work
- ! Above mentioned systems, where a special mechanical strength is required

## SPECIFICATIONS


Article code: DSD2X(160){Ø}/L  
 Temperature range: -30°C to 375°C

Operating pressure: up to +3000 Pa  
 Operating air velocity: max. 30 m/s  
 Bending radius: min. 1 x Ø  
 Standard diameter range: 80 – 200 mm  
 Standard length: 10-meter rolls, 30 meters on request


## CLASSIFICATIONS

EU (EN 13501-1): A1

D(mm)	Tolerance	DA (mm)
080	+1,0 / -0	087
100	+1,0 / -0	107
125	+1,0 / -0	132
140	+1,0 / -0	147
150	+1,5 / -0	157
160	+1,5 / -0	167
180	+1,5 / -0	187
200	+1,5 / -0	207



## PRESSURE LOSS (STRAIGHT DUCT)

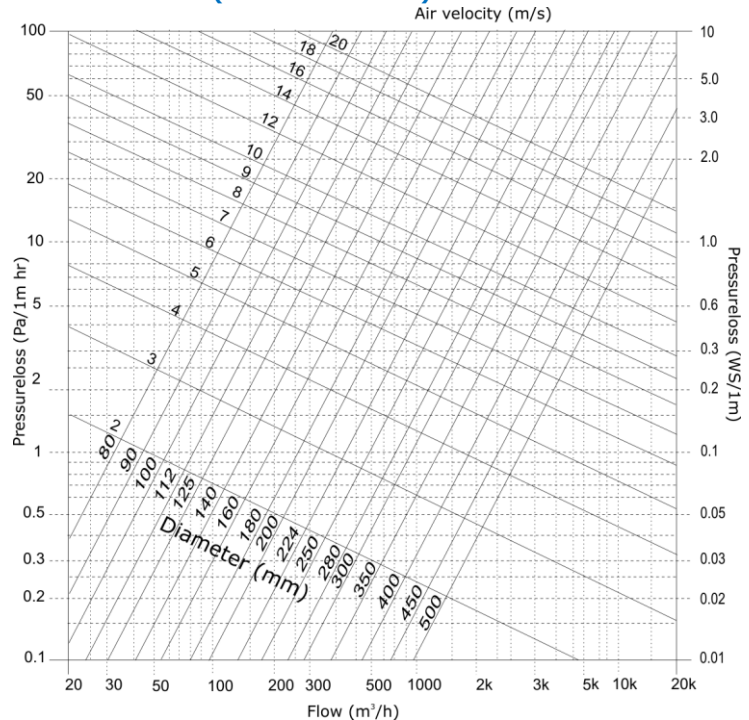

## HOW TO INSTALL

The SEMIDEC Galvanized ducts can easily be cut with a metal saw or a sharp blade. The bending is done by hand. Connecting a SEMIDEC Galvanized duct can be done by simple fitting to an apparatus. Sealing is achieved with a tape sealing or sealant. The fixing is conducted by a clamp placed on the tape adhesive, by rivets or by self-drilling screws. The assembly of two lengths requires the use of a male fitting of Galvanized steel or aluminium.

The **SEMIDEC GALVA** fulfills all the requirements and are classified as specified within EN 13180: *Ventilation for buildings – Ductwork - Dimensions and mechanical requirements for flexible ducts.*

### LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

### PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

### TRADEMARKS:

SEMIDEC, The DEC logo and DEC International are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

### RESTRICTIONS:

The SEMIDEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the ducts suitable for transporting air with a high concentration of acid and base.

